

# PUR®


## Lead Reducing Pitcher & Dispenser Owner's Manual



Models PPT711W, PPT111W, PPT111W, PPT111R, DS1811Z  
Replacement Filter Model PPF951K

## Your PUR System:

Thank you for choosing PUR! Clean drinking water is the foundation of good health. While your tap water may look clean, Lead can get into your water through leaching Lead service lines, or from Lead contained in household plumbing. This PUR pitcher is certified by WQA to remove 99% of Lead\* and reduce many other contaminants. To learn more, visit [PUR.com](http://PUR.com).

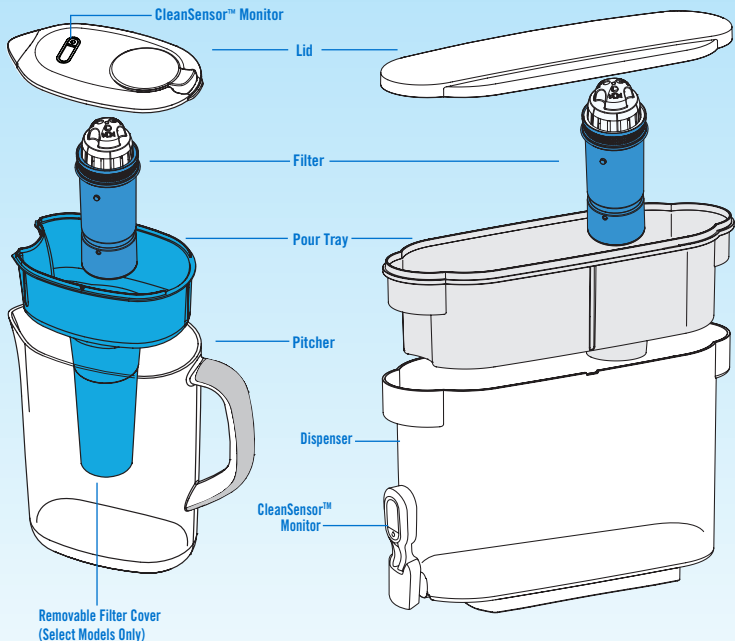

\*Certified by WQA to remove 99% lead

\*Average reduction of lead at pH 6.5 & pH 8.5

## Instructions for Use:

- 1** Soak the filter in cold water for 15 minutes.




- 2** Hand wash pitcher, lid, pour tray and removable filter cover (select models only) with mild soapy water. Rinse well.


- 3** Hold filter under cold running tap water for 10 seconds. Allow excess water to drain.

- 4** Attach removable filter cover (select models only). Twist counterclockwise to lock.

- 5** Insert the filter into the pour tray and push down and twist clockwise to lock.



- 6** Fill pour tray with cold water. Do not use hot water. Allow the pour tray to completely drain into the pitcher or dispenser reservoir.



### For Optimal Use, Care and Safety

- Use cold water only. DO NOT use with water above 82°F/28°C as this may damage the filter.
- Wash dispenser CleanSensor™ Monitor under running water, do not submerge.
- DO NOT use with water that is microbiologically unsafe, or of unknown quality, without adequate disinfection before or after the system. Individuals requiring water of a certain microbiological purity should consult their physician.


## CleanSensor™ Monitor:

PUR pitcher and dispenser filters provide up to 30 gallons of cleaner, refreshing water and last for up to 2 months. The CleanSensor™ Monitor is an easy way to see when it is time to change your filter because it measures the amount of time the filter has been in your pitcher. Be sure to activate your CleanSensor™ Monitor when you first use your pitcher or dispenser, and reset it every time you replace your filter.




### 1 TO ACTIVATE YOUR CLEANSENSOR™ MONITOR:

A. Press and hold the reset button  for 5 seconds.



B. As you hold the button, red, yellow, and green lights will turn on together. **RELEASE THE RESET BUTTON WHILE ALL THREE LIGHTS ARE STILL LIT.** The green light will blink 6 times after you release the button.



C. You have successfully activated the CleanSensor™ Monitor. Appropriate light will flash 6 times after water is poured from the pitcher or dispenser. Lights will remain off until after water is poured from the pitcher or dispenser.



### 2 TO RESET WHEN FILTER IS CHANGED:

A. Press and hold reset button for 5 seconds.

B. As you hold the button, red, yellow, and green lights will turn on together. **RELEASE THE RESET BUTTON WHEN THE GREEN LIGHT BLINKS ALONE.**

Be sure to reset your CleanSensor™ Monitor every time you replace your filter. The CleanSensor™ Monitor contains a non-replaceable battery. After several years of use, the battery will eventually stop working but the pitcher or dispenser is still functional.

## Troubleshooting:

Water is filtering slower than usual.	Remove the filter and shake vigorously until you hear the granules shifting inside.
Unfiltered water leaks into the filtered water reservoir.	Check to be sure that the filter has been twisted firmly into place.
Unfiltered water is leaking out of the pour tray when I tip the pitcher to pour.	Completely drain the pour tray before pouring filtered water out of the pitcher to prevent unfiltered water from mixing with the filtered water.
Indicator lights stopped working.	The indicator lights may have gone into sleep mode. See CleanSensor™ Monitor activation instructions.

## 90 Day Warranty:

PUR (Warrantor), warrants your PUR Water Filter Unit (PPT711W, PPT711R, PPT111W, PPT111R, DS1811Z.) for ninety (90) days from the date of purchase (except for the filter cartridge which is warranted for 30 days) against all defects in materials and workmanship, when used in compliance with the owner's manual.

If the product proves to be defective within ninety days from the date of purchase, call 1-800-787-5463 Monday-Friday from 9:00 A.M to 5:00 P.M EST. The warrantor assumes no responsibility for incidental or consequential damages; for damages arising out of misuse of the product or the use of any unauthorized attachment. Some provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may have other legal rights which vary from province to province. System complies with applicable provincial and local regulations.

Should service be required or you have any questions regarding how to use your PUR product, please contact PUR Consumer Relations: [PUR.com/support](http://PUR.com/support), 1-800-PUR-LINE, [ConsumerRelations@kaz.com](mailto:ConsumerRelations@kaz.com)

## Technical Specifications

**PPF951K**  
Included with system



**CRF950Z**  
Certified with system, sold separately.



Filter Capacity\*

30 gallons (113 liters)  
up to 1-2 months

40 gallons (151 liters)  
up to 1-2 months

Rated Service Flow

Not Applicable

Not Applicable

Maximum Temperature

82°F (28°C)

82°F (28°C)

Minimum Temperature

34°F (2°C)

34°F (2°C)

\*For system to perform as shown in the Performance Data Sheet, it is necessary to replace the filter when it exceeds filter capacity.

Testing was performed under standard laboratory conditions, actual performance may vary.

The contaminants or other substances reduced by this water filter are not necessarily in all users' water. Do not use with water that is microbiologically unsafe, or of unknown quality, without adequate disinfection before or after the system. Systems that are certified for cyst reduction may be used on disinfected water that may contain filterable cysts. Individuals requiring water of certain microbiological purity should consult their physician.

Replacement filters may be purchased at most retail outlets.





System with CRF950Z or PPF951K filter cartridge tested and certified by WQA against NSF/ANSI Standards 42, 53 and 401 for the reduction of the claims specified on the Performance Data Sheet



System with CRF950Z filter cartridge tested and certified by NSF against NSF/ANSI Standards 42, 53 and 401 for the reduction of the claims specified on the Performance Data Sheet.

System with PPF951K filter cartridge tested and certified by NSF against NSF/ANSI Standards 42, 53 and 401 for the reduction of the claims specified on the Performance Data Sheet in Tables 1.2, 1.3 and 1.4

**Performance Data Sheet** For Pitchers Model No. PPT711W, PPT711R, PPT111W, PPT111R, DS1811Z. Replacement Filter Model No. PPF951K (Included with system) and CRF950Z (Sold separately) These systems have been tested according to NSF/ANSI 42, 53 and 401 for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42, 53 and 401.

Performance Data Sheet	PPF951K Included with system	CRF950Z Certified with system, sold separately.		
				
Substance	PUR Reduction Data		NSF/ANSI Standard Requirements	
	Overall % Reduction	Overall % Reduction	Influent challenge concentration (mg/L)	% Reduction Requirement / Maximum permissible product water concentration (mg/L)
Table 1.1 Standard 53 - certified by WQA to the NSF/ANSI Standard				
Lead (pH8.5)	97.7%	Not Certified	0.15 ± 10%	0.01
Lead (pH6.5)	99.4%	Not Certified	0.15 ± 10%	0.01
Table 1.2 NSF/ANSI Standard 42 - Aesthetic Effects NSF Certified				
Chlorine (Taste & Odour)	>97.5%	>97.5%	2.0 mg/L ± 10%	≥ 50%
Nominal Particulate (Class I) (Class I, particles 0.5 to <1µm)	>99.9%	99.1%	at least 10,000 particles/mL	≥ 85%
Zinc	86.9%	86.9%	10 mg/L ± 10%	5 mg/L
Table 1.3 NSF/ANSI Standard 53 - Health Effects NSF Certified				
Cyst	99.99%	>99.99%	minimum 50,000/L	0.9995%
2,4-D	86.0%	86.0%	0.210 ± 10%	0.07
Atrazine	82.7%	82.7%	0.009 ± 10%	0.003
Benzene	>96.4%	>96.4%	0.015 ± 10%	0.005
Cadmium (pH6.5)	98.3%	98.3%	0.03 ± 10%	0.005
Cadmium (pH8.5)	98.7%	98.7%	0.03 ± 10%	0.005
Copper (pH6.5)	98.2%	98.2%	3.0 ± 10%	1.3
Copper (pH8.5)	95.1%	95.1%	3.0 ± 10%	1.3
Mercury (pH6.5)	96.7%	96.7%	0.006 ± 10%	0.002
Mercury (pH8.5)	>96.6%	>96.6%	0.006 ± 10%	0.002
Tetrachloroethylene	>96.6%	>96.6%	0.015 ± 10%	0.005
Carbon Tetrachloride	96.0%	96.0%	0.015 ± 10%	0.005

# Performance Data Sheet

**PPF951K**  
Included with system



**CRF950Z**  
Certified with system,  
sold separately.



Substance	PUR Reduction Data		NSF/ANSI Standard Requirements	
	Overall % Reduction	Overall % Reduction	Influent challenge concentration (mg/L)	% Reduction Requirement / Maximum permissible product water concentration (mg/L)
Table 1.4 Standard 401 - Emerging Compounds† NSF tested				
Altenolol	94.3%	94.3%	0.0002 ± 20%	0.00006
Bisphenol A	94.2%	94.2%	0.002 ± 20%	0.0003
Carbamazepine	94.3%	94.3%	0.0014 ± 20%	0.0002
Estrone	96.1%	96.1%	0.00014 ± 20%	0.00002
Linuron	>96.1%	>96.1%	0.00014 ± 20%	0.00002
Nonyl Phenol	95.9%	95.9%	0.0014± 20%	0.0002
TCEP	94.2%	94.2%	0.005 ± 20%	.0007
Trimethoprim	>96.2%	>96.2%	0.00014 ± 20%	0.00002

\*NSF Standard 401 has been deemed as "incidental contaminants/emerging compounds." Incidental contaminants are those compounds that have been detected in drinking water supplies at trace levels. While occurring only at trace levels, these compounds can affect the public acceptance/perception of drinking water quality.



**For purchases made in Iowa:** This form must be signed and dated by the buyer and seller prior to consumption of this sale. This form should be retained on file by the seller for a minimum of two years.

**BUYER:**

**SELLER:**

Name

Name

Address

Address

City

City

State

Zip

State

Zip

Signature

Date

Signature

Date

© 2018 All rights reserved.

Distributed by Kaz USA, Inc., a Helen of Troy Company, 400 Donald Lynch Boulevard, Marlborough, MA 01752  
PUR® is a trademark of Helen of Troy Limited.